

Gen. II Ford 300

Install



3420 South Lapeer Rd.

Unit B

Metamora, MI. 48455

248-393-1621

TABLE OF CONTENTS

1.	Kit Contents.....	3
2.	Installation Instructions.....	4
3.	Component Description.....	10
4.	Final Checks.....	12
5.	Installation tips (helpful installation pictures).....	13
6.	Component Parts and Part Numbers.....	19
7.	Troubleshooting.....	20
8.	Diagnostic Trouble Codes.....	35
9.	ECM Pin Out and Wire Coding.....	38
10.	Wiring Diagram.....	39

Congratulations on the purchase of your *Affordable Fuel Injection*™ TBI system. We are confident that this purchase will give you the performance and driveability you deserve from your GSE equipment. The following instructions are intended to provide you with thorough description for installing your TBI system. If you do not understand any part of the instructions, need clarification or simply need more information, please e-mail us at: gsetechinfo@affordable-fuel-injection.com. Please read through the instructions completely before beginning your installation. Many of your questions may be covered within this manual.

Verify that all of the components are included in your shipment.

1. Wiring Harness
2. ECM
3. Throttle Body (with IAC and TPS)
4. ECT sensor (Engine Coolant Temp)
5. IAT sensor (Installed in throttle body)
6. MAP Sensor (Manifold Absolute Pressure)
7. Heated O2 Sensor with exhaust ring for installation
8. Fuel Pump Relay
9. Power Relay
10. Check Engine Light
11. Hall Effect distributor
12. Distributor module
13. Fuse protection link
14. Fuel filter
15. Inline Fuel Pump
16. Fuel Pressure regulator
17. Pre made fuel lines (optional)
18. ECM bracket and mounting hardware
19. ECM controlled start relay (optional)
20. Low fuel shut off sensor (optional)
21. Low fuel indicator light (optional)
22. Electric Fan Relay (optional)

INSTALLATION INSTRUCTIONS

NOTE: THIS IS A CUSTOM FUEL INJECTION SYSTEM BUILT FOR YOUR GSE EQUIPMENT. AS WITH ALL CUSTOM PROJECTS SOME FABRICATION MAY BE REQUIRED. YOU MAY ALSO REQUIRE SOME SMALL PARTS THAT ARE NOT INCLUDED IN THE KIT.

ECM

The ECM is the central unit of the fuel injection system. This unit provides the signals that trigger the injectors. The ECM is mounted in the same location as the mechanical fuel pump was located. An extra thick gasket is supplied to insure a secure seal at this location.

This is a state of the art ECM which is weatherproof, shockproof and heat proof.

WIRING HARNESS

The wiring harness included with this kit has been specially built for your unique application. This harness only includes the connectors and leads that are required to run your particular engine based upon the order specifications. Therefore, if there are leftover parts this indicates that an error has been made during assembly and installation of the system. Each connector will be marked with a label to the correct sensor that it is to be connected too. In the following section we will describe each sensor and the connector that attaches to it. The wiring harness is fabricated to allow the proper sensor to be hooked up to the respective connector. The "keying" of the connector will not allow for an improper connection.

There is one fusible link required which is to be securely connected to the red battery wire after this wire is cut to length. Fuses which also protect the system are located integral to the relays in some applications.

The PINK power wire needs to be attached to an Ignition 1 (IGN1, battery power only with key on or in the crank position) power source. Ensure that this is an ignition 1 source. An ignition 1 source is 12volts available any time that the key is not in the off position. Also this PINK wire must have 12V while the vehicle is in the cranking mode (starting). This means the wire will have power when the key is on, or start, or back to on. Usually this wire can be taken from the proper terminal on the ignition switch, the power side of

the coil (+), or from the fuse box. The system will not work if power is not provided to the (PINK) ignition wire while cranking.

The red wire is to be connected to a direct battery lead which has 12v always feeding it; a direct connection to the battery or starter relay is optimal. It is important that these wires are connected to the indicated source or your fuel injection system will not operate properly.

A main fuse link is provided which is the main fuse protection for the entire system. This link is to be installed at the battery source and secured and sealed to the red battery wire. Two additional fuses are used for protection and located in the relays.

It is very important that the ECM and components be supplied with proper voltage at all times. Improper operation of the charging system can result in system malfunctions and drivability issues.

Included are two relays, a power relay and fuel pump relay. These relays are of the same design and can be used for either application. The power relay is used to ensure proper voltage is supplied to your system so as not to tax the current wiring of the vehicle with undue voltage requirements. The power relay connects to Ign. 1 feed to power up the relay (pink wire you connected above), and the input to the relay is battery powered. This battery lead is labeled and can be attached directly to the battery, the starter solenoid, or any other appropriate full time 12-volt supply. We have included a length of wire long enough to choose your own connection option. Insure that the main fuse circuit protection is installed between the battery power source and the red battery wire. A low temperature solder connector is also provided to provide a secure and sealed connection. The fuel pump relay is controlled by the ECM and no connections are required except for the power wire to the fuel pump itself.

An ALDL connector is another extension of the harness which is located in your wiring harness at the back side of the engine.. This connector is a 4 pin weathepak connector with a sealed connector installed to protect it from the elements. This connector allows the use of a C.A.N. based OBDII scan tool to read operational data of the unit as well as read and clear diagnostic codes. An OBDII connector with the proper Weatherpak termination is used with this to gain access to the data stream of the ECM.

Two wires are also provided which connect to a check engine light. This light can be mounted in the dash, use an empty "idiot light" socket in the instrument panel, or mounted in a small bracket under the dash. It should be mounted in an area noticeable in case of any malfunctions. De-icer applications typically choose to mount the ALDL connector and the check engine light inside the control box. This allows for diagnostics and

troubleshooting for the technicians only. The wire from the ECM is the ground for the light. When a fault exists, or the system is in diagnostic mode, or the engine is not running with the key on, the light is illuminated. The other side of the light requires a 12v ignition feed that has been supplied and marked for this purpose.

Several black wires with an eyelet on the end are to be bolted to an appropriate engine ground. Insure that you have cleaned the surface where this wire will mate to. Empty threaded holes in the intake manifold or cylinder head have been good locations for this wire. Two star washers have been provided to insure a good continuity to ground.

It is advisable to run a separate ground wire from the battery to the frame of the vehicle. It is also advisable to run another ground wire from the location of the ground wire from the harness to the frame at the same mounting location as the wire from the battery.

FUEL PUMP

An external inline fuel pump has been included with your TBI system. This pump delivers a variable fuel pressure to the throttle body through the fuel pressure regulator. This regulator regulates the fuel pressure between 42 – 55 psi and returned to the fuel tank. This pump should be mounted to the frame of your GSE equipment. If necessary weatherproof the pump by mounting a cover over it.. A fuel filter is to be installed in the fuel line **PRIOR** to the fuel pump. Premature failure of the pump can be the result of improper fuel filter installation. Some aftermarket high density fuel filters can cause a large drop in fuel pressure under load and are not recommended for use with your system. If you are using high density filters insure that you have proper fuel pressure during all modes of operation.

If your equipment is fitted with an electric pusher or scavenger pump these pumps may not provide enough fuel flow for the system to operate properly. To insure that proper pressure is being maintained, monitor fuel pressure over time if you are using one of these pumps. In previous cases these pumps have been removed.

A 12 or 16 Ga. pink wire labeled "Fuel Pump", with sufficient length has been included with the wiring harness for the pump power feed. This wire comes from the fuel pump relay which can be mounted in a convenient under hood location. It may be desirable to enclose these relays in a plastic box or provide suitable protection from any elements. The mounting and the ground are **very important** for proper operation of the fuel pump. A ground wire is to be attached to a stable clean body ground or run back to a battery ground. An improper ground will result in insufficient fuel flow and/or premature pump failure. Mount the fuel pump in the bracket supplied or similar, to keep the pump noise from radiating into the vehicle.

You may want to "prime" the fuel feed line with gasoline to aid in the priming of the pump for proper operation.

FUEL LINES & PRESSURE REGULATOR

NOTE: Only use fuel line rated for fuel injection. If your kit was ordered with premade fuel line this line is already fuel injection rated. Steel line or braided fuel line is the most desirable for this application.

Your TBI fuel injection system only requires one fuel line to the throttle body from the fuel pressure regulator for proper operation. This fuel line begins at the fuel pump, is "T'd" into the side of the fuel pressure regulator and attached to the throttle body. (See Picture next section) An additional fuel line attaches to the bottom of the fuel pressure regulator and is used to return the low pressure regulated fuel back to the fuel tank. The ideal installation incorporates both the fuel feed and return lines attached to the fuel tank. Some fuel tanks are supplied with a tank vent for evaporative emission purposes. These fittings usually have a restriction incorporated internally and are not sufficient for a fuel return. If the restriction can be removed and the fitting is of sufficient size, this can be used for a return. Do not eliminate this fitting for evaporative emissions purposes if these items are still in use. Insure that any factory fittings that are on the fuel tank are free flowing and do not restrict the flow of fuel back to the fuel tank.

On TUG brand units most fuel tanks have two fittings on the bottom of the tank that can be used. The one fitting that is currently used can be used for the feed line to the fuel pump. The other plugged line can be used as a return line. This second fitting has a tube internally in the fuel tank that allows for a return of the fuel higher in the tank; insure that you do not use this for the feed line. Some stations have chosen to install a shut off valve in the feed line prior to the fuel filter for easier fuel filter service purposes.

THROTTLE BODY

Your AFI throttle body is a direct replacement for your 1 bbl. carburetor. The air cleaner stud mounting bar on your current carburetor is to be removed and installed onto your new throttle body. The throttle lever is positioned similar to your throttle lever on your carburetor. The throttle cable will attach to your new throttle body in the same manner as your carburetor. If your current carburetor has an additional throttle return spring it is advisable to maintain this same return spring.

Ensure that smooth unrestricted movement can be obtained from the accelerator pedal from idle to WOT (Wide Open Throttle). Connect the wires to the injector, TPS (Throttle Position Sensor), IAT (Intake Air Temperature) and IAC (Idle Air Control) valve.

Connect the fuel line to the side of the throttle body and direct to the back side of the engine. This is an AN type or barbed pipe thread fitting and is sufficient for the pressures encountered with the fuel injection system.

ENGINE SENSORS

MAP SENSOR

The MAP sensor is a very important part of the fuel injection system. This sensor sends a voltage to the ECM in relation to the amount of vacuum (pressure) the engine is creating. This signal is used in conjunction with the engine speed to infer the amount of air that is being used by the engine. This is what is called a speed/density system. Because fuel control is very dependent upon this signal it is very important to install correctly. This sensor is to be installed as close to the manifold vacuum source as possible. The port on the sensor is to face down with the vacuum line attached. This vacuum line should have no sags or dips and the length should be as short as possible. Some people install this sensor in the center of the firewall towards the cowl or even under the air cleaner at times. Attention needs to be given to the connection of the vacuum line ensuring no leaks. For the velocity governor application insure that the vacuum line is connected to the manifold below the governor.

COOLANT SENSOR

The coolant sensor is just like it sounds; it sends an electrical signal to the ECM in proportion to the engine coolant temperature. This sensor is to be installed before the thermostat preferably or in the block itself. (See picture next section) There is a plug in the rear of the block that can be used for the ECT sensor or anywhere on the engine side of the thermostat. Connect the two-wire connector when installed. Ensure that there are no coolant leaks from the threads of the sensor. It is also important that a continuous flow of coolant is present at the tip of the sensor or a false reading and engine damage can occur.

INTAKE AIR TEMPERATURE SENSOR

The IAT is just like it sounds; it sends an electrical signal to the ECM in proportion to the air temperature in the throttle body. This sensor is already mounted in the side of the throttle body. Connect the two-wire connector when installed. Ensure that there are no leaks from the threads of the sensor if replacing the sensor.

HEATED OXYGEN SENSOR

The oxygen sensor is installed in the exhaust pipe and samples the exhaust to determine if the engine is running rich or lean of 14.7:1 air/fuel ratio. The O2 sensor should be installed as close to the engine as possible. Many replacement manifolds have a boss already tapped that will accept an O2 sensor. It is preferable to use this location or drill and tap that location on the manifold. A threaded boss has been included with your kit that can be welded into the exhaust pipe to hold the O2 sensor. (See Picture next

section) Placement of this boss should always be in a position that is somewhere between horizontal to vertical. In no instance should the sensor wire be pointed in a position that would be considered facing down.

ENGINE GROUND

An eye terminal with 1-3 black wires and labeled "engine ground" needs to be properly attached to the engine block. It is very critical that a proper ground is used for this input to the ECM and that it is mounted to the engine itself. ***It is most critical that this is a connection going to a bare grounding surface and not a painted surface. It is good practice to run an extra ground wire from the negative (-) on the battery to the ground wire coming from the ECM (from the wire harness Engine ground). Make sure that the ground from the engine to the body of the vehicle is intact. An improper ground will not allow the system to operate properly.***

DISTRIBUTOR MODULE

This GEN II AFI fuel injection system includes full ECM control of the spark advance. A distributor module is mounted inside of a high temperature plastic box and mounted to an aluminum base plate.

Two connectors are located on the side of the distributor module box. A 4 pin connector from the wiring harness will attach to the appropriate place on the module. An additional 2 pin connector is included with your kit and is the power supply and trigger for the ignition coil. The pink wire labeled 12v ign. will connect to a 12 volt ign. 1 source as described above. The white wire will connect to the negative terminal of the coil. (See Picture next section). The coil still requires a 12 volt connection to the "+" side of the ignition coil.

DISTRBUTOR

AFI's GEN II EFI system for the I-6 Ford engine uses a Hall Effect distributor which has been supplied with your kit to deliver the appropriate spark ignition. This distributor has been modified to work with your AFI conversion kit. The distributor supplied with your kit is to replace your current distributor.

Insure that after your new distributor has been installed that the appropriate timing mark is used to set the initial ignition timing. Bring #1 cylinder up to TDC with the spark plug removed and verify the timing you will use is lined up with this mark. Some engines that have been updated can have two different timing mark locations. If not properly set the engine will not operate correctly.

There is a 3 pin weatherpak[®] connector that will attach directly to the mating 3 pin weatherpak[®] connector coming from the wire harness and marked

distributor. After installing the distributor and running the engine set the base ignition timing to 12 deg. BTDC.¹

CRANK INPUT (For Smart Start only)

A wire labeled "CRANK ENABLE" is to be installed on the crank terminal of the ignition switch. The vehicle wire attached to the ignition switch is to be removed and connected to the "STARTER SOLENOID" wire from the ECM. This signal is used to engage the starter but also limit the starters use during low fuel or out of range engine running conditions.

LOW FUEL LEVEL SHUT DOWN (Option)

This available option will shut the engine down and lock out the starter (comes with smart start above) if the fuel level reaches a critically low level. This protects the fuel pump from running dry and premature failure.

A single wire marked "FUEL LEVEL INDICATOR" attaches to the provided fuel tank sending unit. For TUG Inc. vehicles simply remove the 4 screws holding down the current level indicator and replace with the provided sending unit. Some vehicles are already equipped with a fuel sending unit. In this case the appropriate wire from the fuel injection harness attaches to the fuel sending unit.

It may be necessary to attach an additional ground wire to the fuel tank or fuel sending unit. Insure that this wire is located in an area that is remote and attaches to a good ground.

Some fuel tanks will not work with a fuel tank sending unit and require the stainless steel tube type sender. This type unit will require additional modifications to the fuel tank to install. In many instances the sender is installed in place of the current sender. In either case insure no fuel leaks and a tight seal with the sending unit to the tank.

LOW OIL PRESSURE SHUT DOWN (Option)

This available option will shut the engine down if the oil pressure drops below 4 psi while running or after a start. Included is a block that will screw into the current tapped block location for oil pressure. Screw this block into the engine using thread sealer to reduce the possibility of an oil leak from the threads. Plug the 3 pin round connector labeled "Oil Pressure Sender" into the appropriate connection on the sending unit.

An additional hole is included that will allow for the installation of an analog oil pressure sending unit. These are typically the stock unit or similar for a dash mounted oil pressure gauge or light.

¹ Weatherpak is a Registered Trademark of Delphi Corporation.

FINAL CHECKS AND START UP

After you have finished the above installations you are ready to check the system for operation. Turn the ignition key to the "ON" position, but do not start the engine. The fuel pump should turn on for about 2 seconds and then turn off. If this does not happen see #7 below in troubleshooting. . Disconnect the connector from the injector and crank the engine for about 5 seconds; reinstall the injector connector after this operation. Leave the ignition in the "ON" position until the fuel pump has turned off. Turn the ignition off for at least 10 seconds and repeat the ignition cycle. Perform this operation 2 or 3 times to allow fuel to fill the system preparing to start. Inspect all fuel lines and connections to ensure there are no fuel leaks. It would also be appropriate at this time to install a fuel pressure gauge to insure that the proper fuel pressure of 42 -55 psi is being delivered.

Assuming no fuel leaks, you are ready to start the engine. Do not press on the accelerator pedal to start the engine. The IAC valve will provide the proper amount of air for the vehicle to start and run. Start the engine and let it idle; it may take a bit to run smoothly. At this point the control system has not "learned" the engine and the IAC valve has not learned its proper position. These are all functions of the fuel injection system that happen after the engine has been running. It may be necessary to adjust the ignition timing close to the final setting of 12 deg. BTDC.

Restart the engine and let it idle for a while. Insure that there are no fuel or vacuum leaks while running and that the idle appears to be controlled by the ECM. The engine speed will be higher while cold and first started and will come down to a base idle on its own. If the engine will not idle properly check for vacuum leaks, proper timing setting, or a check engine light illuminated. When all of these checks have been made go to troubleshooting guide #10 to and set the base engine speed to 750 RPM in neutral or 1000 RPM in neutral for de-icing applications. When you are confident that all is running properly, you may shut it down and complete the remainder of the installation.

Set ignition timing to 12 deg. BTDC with the engine fully warmed up and at 800 RPM or less. Insure that the timing is in fact being set with the proper TDC indicator. We have found on some engines that two different indicators are present and that the timing was set to the incorrect indicator. This causes operational issues with the engine if the timing is not set correctly.

Secure any wires that you may choose, ensuring they are routed away from exhaust manifolds, cables, etc.

Install the air cleaner and you should be ready for operation. If not completed in the earlier steps of installing the throttle body, the bar from the

carburetor needs to be mounted to the top of the throttle body to hold down the air cleaner.

A final check with a scan tool should be performed. Your OBDII enabled scan tool can be used in Generic OBDII mode to access the sensor data. Your sensors fully warmed up should read close to the following values.

ECT > 180

IAT ambient temperature to 40 deg. or so above ambient.

MAP 8 - 13 in. / 16 - 21 in. HG.

TPS 0% .5 - .7 volts

Open Loop at idle/ Closed loop at part throttle

Idle speed 775 - 800 RPM

STFT steady at idle, dither about 0% at part throttle

LTFT 0 to + or - 15% idle at times is offset more. Call tech support for any further questions or clarification.

Once you have installed your Affordable Fuel Injection system you will enjoy the modern technology of fuel injection for years to come. You will benefit from a low maintenance system that provides good drivability and adjusts for towing, altitude and other normal drive situations. The greatest advantage to EFI is dependability and drivability. EFI for the most part is relatively maintenance free once installed and working properly. The sensors are robust and provide for many hours of maintenance free operation. EFI also provides seamless drivability. The system supports all of your engine functions whether it is -20 deg. Or 100 deg, at sea level or 5,000 ft.

Thank you from Affordable Fuel Injection.

FINAL INSTALLATION QUICK CHECK LIST

- 1. Pink ignition wire connected to 12 volts during run and crank**
- 2. Check Engine Light connected to 12 volts not ground**
- 3. MAP sensor is installed with port down and to full manifold vacuum source.**
- 4. All fuel lines are tight and no fuel leaks are present.**
- 5. Low Fuel Light connected to 12 volts not ground (if equipped)**
- 6. Distributor wires correctly terminated.**
- 7. Vacuum advance unit disabled and disable bar in place.**
- 8. Thermostat is 190-195 deg. and operational.**
- 9. Extra grounds supplied to the frame and the block.**
- 10. Insure no oil leaks from oil pressure sending unit (if equipped)**
- 11. Timing set to 12 deg. BTDC.**
- 12. Idle speed in neutral is between 750-800 RPM.**
- 13. TPS is operating between .5 - .7 volts at closed throttle.**

Affordable Fuel Injection Gen 2 Harness/ECM Installation Instructions


Mount the ECM Bracket in place of the mechanical fuel pump. Note: DO NOT forget gasket




Run the harness trunk along side of motor using cover bolts to bolt down harness as shown below.



Run the portion of harness that goes to the throttle body up using back valve cover bolt and run harness to outside of intake manifold up towards the throttle body.

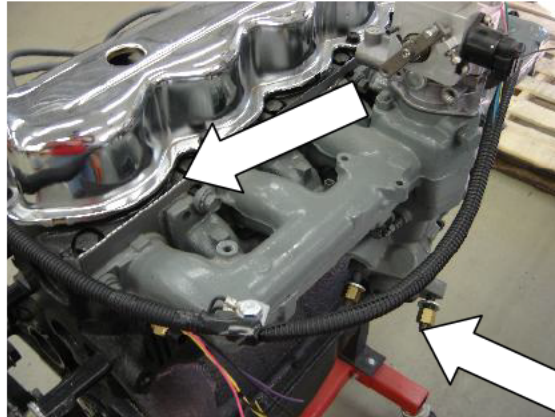

Note: Do NOT forget to bolt down the block ground eyelets using provided star washers- Fasten the eyelets under the provided clamp using both star washers on the TOP OUTSIDE CORNER of the INTAKE Manifold.

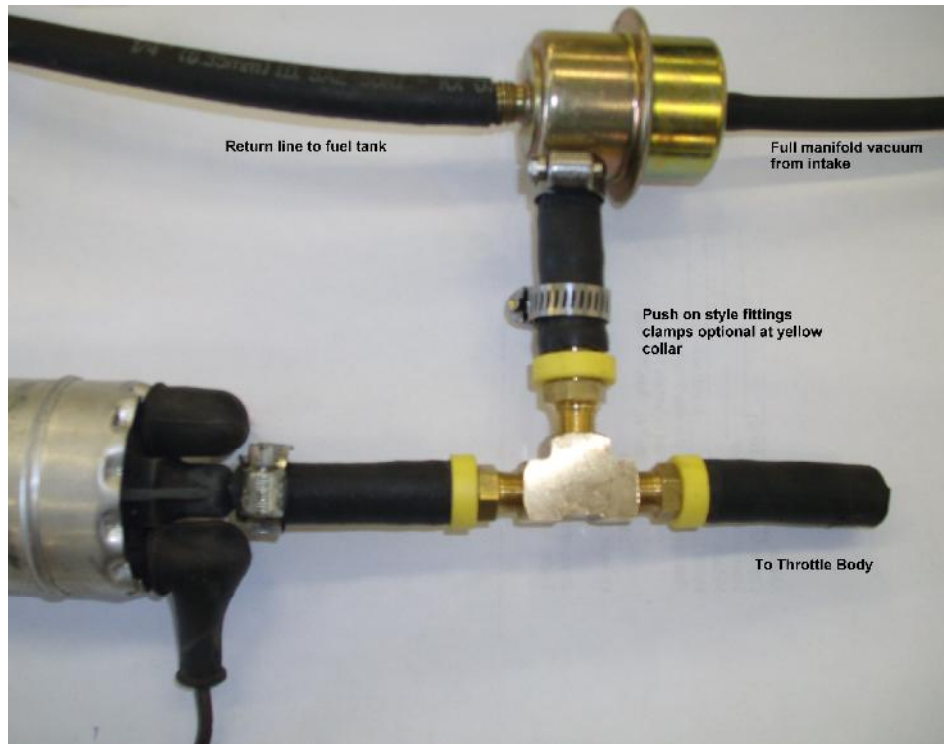


Fuel pump and fuel pressure regulator set up




Preferred MAP sensor orientation

Typical O2 installation when tapped hole is not available in the exhaust manifold. An 18mm hole can be drilled and tapped into the standard O2 location in the exhaust manifold.

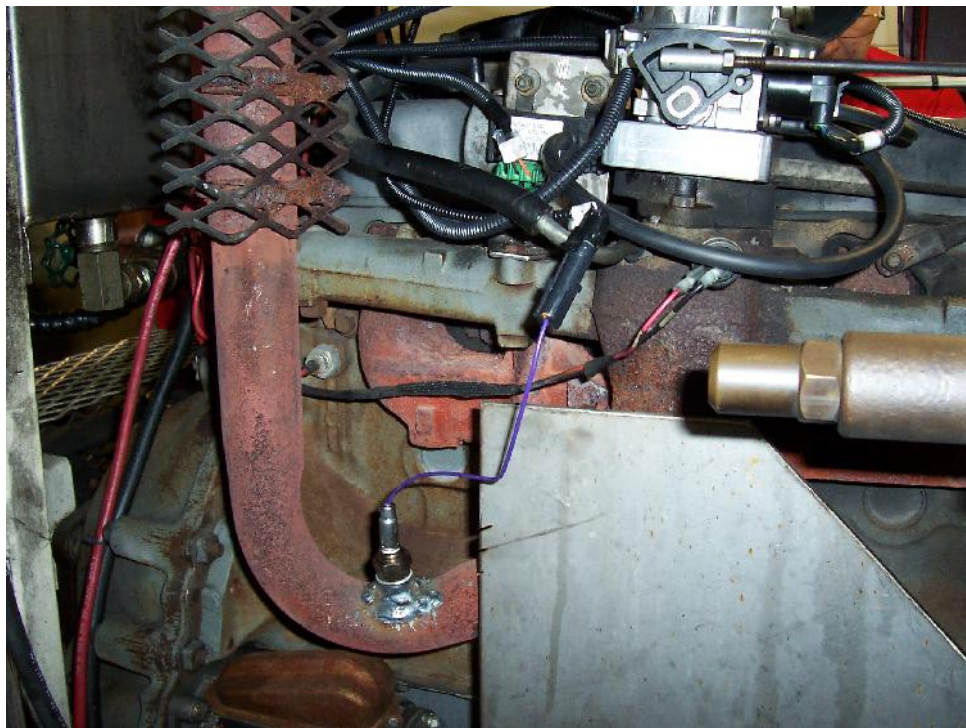

De-Icer O2 sensor installation

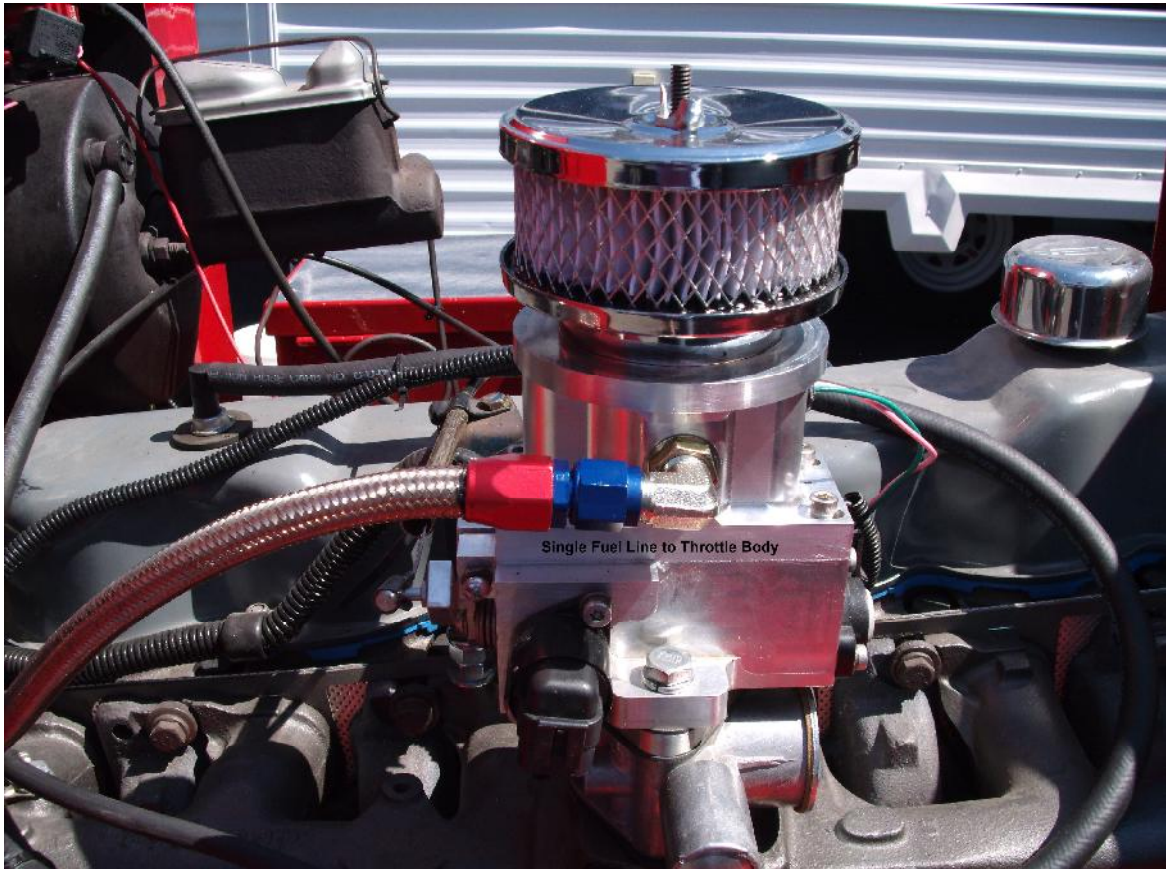

Above – typical single fuel line installation, shown with optional braided fuel line.

Below typical ECT installation at the rear of the block under the intake manifold. ECT needs to have constant flow of coolant on the sensor.



Distributor module connections. Pink - 12v white to coil neg.

Component Parts and Part Numbers

Harness *	8510
ECM	7203
IAT	7303
ECT	7302
MAP	7300
O2 (Heated)	7301H3
TPS	7306
IAC	7309
Throttle body	7610
Injector	7660
Flange Gasket	7621
Fuel Pressure Regulator	7615
Fuel Pump	7703
Fuel Pump Ground wire harness	8500gnd
Fuel Pump Hold Down Clamp	7703-cl
Relay	7311h
CE Light	7313
Low Fuel Light	7315
Fuse Link	7314
Fuel Filter	G7333
Distributor	7815
Distributor Cap	7815-cap
Distributor Rotor	7815-rot
Oil Pressure Sender	7312
Fuel Level Sender	7316
Distributor Module	7820
OBDII Diagnostic Cable	8500OBDII

* Base system

Troubleshooting your TBI Fuel Injection System

Quick Troubleshooting Guide

Connect Scan tool to the engine:

Verify proper value of each sensor with Key on Engine Off.

- TPS 0%
- MAP 90 – 100 dependent on altitude, will be less at high altitude.
- ECT consistent with engine temperature whether cold or warm
- IAT ambient temperature or higher

If any of the above sensors are broadcasting default values work to that problem

Default values are as follows:

- TPS 10%
- MAP 40
- IAT & ECT 77 deg. F or 25 deg. C.

If engine cranks and will not start unplug the connector from the TPS and attempt to start. If engine starts repair TPS circuit.

If all the above checks are OK, install fuel pressure gauge.

- Turn key on and observe fuel pressure. Fuel pump should cycle on and then off and pressure should be between 50 – 55 psi. If fuel pump does not turn on or pump does not provide full pressure repair fuel system
- If pump cycles on and off, determine if pump comes back on when the engine is cranked. Fuel pump should come back on when engine is cranked.
- Verify that fuel pressure registers between 42-48 with the engine running and that the pressure rises with a rapid movement of the throttle. Repair fuel system if pressures are not in line or pressure drops on acceleration.

When all of these checks have been made continue to step by step guide to further diagnose operational issues.

Troubleshooting guide

Most of the problems encountered while installing your fuel injection system or after a time of operation are very simple. If your check engine light is on you more than likely have a hard fault meaning something is grounded out, unplugged, operating out of range or has gone bad. See below for how to determine what the fault may be and code definitions.

With the addition of Fuel Injection to your engine it is important to remember that the basics are still there, necessary and have not changed. Batteries must be fully charged, charging systems fully operational, the ignition system is fully operational and the integrity of the engine is intact. All of these items are common to an engine and need to be in full operational condition regardless of the fuel system that has been added to your engine.

The ALDL connector allows for full diagnostics of your unit

If you have installed a Fuel Injection system in your vehicle and are having some initial issues here is a quick checklist to work from to get you started.

Pink Ignition wire MUST be connected to 12 volt switched ignition that receives power during crank and key on.

1. Check to make sure your check engine light is not on, or that it is on with the key on but the engine is not running.
2. Make sure that the red battery wire is connected to a battery source (It is highly recommended that this wire is connected directly to the battery) and the pink wire is connected to an ignition 1 source. If your ignition wire is not connected to an ignition 1 source your ECM will not be powered while cranking the engine.
3. Check that the ground wire is securely fastened to the block and that the interface between the block and the terminal is clean.
4. Ensure that there are **NO** vacuum leaks.
5. Ensure that your MAP sensor is connected to a full manifold vacuum source and not a ported source.
6. Set the ignition timing correctly making sure that you have the engine fully warmed up and operating less than 800 RPM's.
7. Ensure that you have full manifold vacuum routed to your fuel pressure regulator and there are no vacuum leaks with this connection.
8. Check your fuel pressure to ensure that you are providing the proper pressure to the system.

Fuel Pressure is critical for proper operation. Fuel tank must be free from debris and fuel pressure needs to be constant and consistent.

Some aftermarket high density fuel filters can cause a large drop in fuel pressure under load and are not recommended for use with your system. If you are using one of these types of filters insure that you have proper fuel pressure during all modes of operation.

99% of all issues are usually taken care of with one or more of these 8 steps of diagnosis.

First and foremost the engine and fuel injection system must be free of vacuum leaks. Vacuum leaks are the leading cause of installation issues with your fuel injection system. Check all sources of potential vacuum leaks including components not related to the fuel injection system.

There are instances where the vacuum leak is coming from the governor to manifold mating surface. There are two bolts which bolt the manifold together that in some instances do not allow the governor to seal to the intake manifold. In some instances it is necessary to seal these with silicone to provide a positive seal.

Another common issue is a lack of good grounding. Many issues have been resolved simply by making sure that the ground path is secure and clean.

Fuel System Checks

Fuel Pressure is critical to the operation of a fuel injection system. Always check to insure that you have the proper fuel pressure. Fuel pressure should vary between about 42 – 55 PSI. At idle the fuel injection system is typically around 42 – 45 psi. Higher pressure than 55 psi indicates that there is an issue with the installation. Many times this is due to kinked fuel lines, improper routing of the return line and/or fuel line restrictions. (See Part 3 of Troubleshooting guide #3) Many fuel tanks have fittings on them which are used for a fuel tank vent. These fittings are not suitable to use as a return line because they have a restriction in them and restrict the flow of fuel back to the tank. If you have installed your return line to a “vent” line you will need to route the return line in a different fashion.

Fuel pressure on your Gen II TBI unit should vary between 42 – 55 psi based on the amount of vacuum on the fuel pressure regulator and stay constant under all throttle conditions. There should be an increase in pressure from idle to WOT operation of the TBI unit. A pressure drop under this operation indicates a restriction or issue with the fuel delivery system.

With retrofit fuel injection systems many times we are drawing fuel from gas tanks that are many years old; hence many years have passed where contamination can settle into the fuel tank. The electric fuel pump installed for a fuel injection system will drawing a greater volume of fuel from your tank than your old system did. If there are any contaminants in the tank this many times will plug up or greatly restrict the flow of fuel to the system causing many issues.

Step by Step Troubleshooting guide.

Your fuel injection system has been pre calibrated to your particular vehicle. As long as the information about your engine was correctly stated, the system as received will provide many years of trouble free use. However from time to time problems are encountered with your fuel injection system. Here are a few commonly asked questions about fuel injection problems. Match the issue # with the chart below for an explanation of the issue and use the troubleshooting fault tree.

Use of this section may require a digital voltmeter, test light, fuel pressure gauge, timing light, tachometer and/or a diagnostic scan tool. If you are familiar with vehicles and how they are serviced you should be able to work through this section with no issues. In many instances you may want to have a professional automotive technician familiar with fuel injection repair to help you.

- 1. My engine cranks but will not start.**
- 2. My engine is running to lean, or is backfiring on acceleration.**
- 3. My engine is running rich.**
- 4. I do not seem to have as much power as I should.**
- 5. I am getting a sag when I accelerate.**
- 6. My engine takes longer to start than I think it should.**
- 7. The fuel pump is not coming on when I first turn the key on.**
- 8. The RPM on my engine does not come down when I come to an idle.**
- 9. I am not getting as good of fuel economy as I think I should.**
- 10. The engine is revving up and down when I come down to an idle.
There is a large “sucking” sound coming from the throttle body when it**

is warmed up. My engine stalls or almost stalls when I come down to an idle.

11. The engine stalls coming to an idle.

12. My fuel pump is real noisy.

13. My check engine light does not come on when I turn the key on.

14. My check engine light is on when the engine is running.

15. Engine shuts down and sometimes restarts and sometimes it doesn't.

1. Engine cranks but will not start.

There is an assumption that the battery is at a full state of charge, the fuel tank has fuel in it and that all sensors are correctly connected and there are no trouble codes in the ECM.

1. Does the injector spray fuel when cranking the engine?

Yes – Go to step 2.

No – Disconnect the TPS sensor and determine if the vehicle starts, injector sprays.

If engine starts or injector sprays, repair TPS circuit.

If injector does not spray move to the next "NO" step.

No - Remove the injector connector from the injector. With a voltmeter or test light measure the voltage or validate power to the pink wire of the connector with the key on.

Yes – Pink wire has voltage, go to step 1a.

No – There is no power getting to the system. Check for proper connection to the battery, fuses are good, relays have been connected and seated properly. Correct the power issue; if there is still no fuel spray when cranking the engine after this has been corrected go to step 1a.

1a. With the voltmeter or test light still connected crank the engine and verify voltage to the pink wire on the injector connector.

Results: "0" volts or the light goes out when cranking the engine.

The primary (pink) ignition wire is incorrectly connected to the vehicle. This is to be an ignition 1 (ING1) source which is power in both the key run and crank position. Correct the connection of this wire and verify voltage to the pink wire on the injector connector. Test again for fuel spray during crank. If the engine still cranks, is spraying fuel, but will not start go to step 2.

"Low volts, < 8" This is an indication of either a battery in a state of very low charge, a bad battery or too much resistance in the system.

-record the battery voltage while cranking at the battery.

-record the voltage at the pink wire of the injector connector while cranking the engine.

-compare these two voltages, they should be within .2 (2/10) volts of each other. If these voltages are greater than .2 there is a bad connection or too much resistance in the wire feeding the ECM.

-Correct the issue with low voltage. If cranking voltage is above 9 volts while cranking and there is still no fuel spraying the issue is in the fuel delivery system.

"9 volts or higher" this is normal cranking voltage. If there is no fuel spraying while cranking the issue is in the fuel delivery system or ignition system. Troubleshoot the fuel system for improper operation (See Fuel System checks at the beginning of this guide). Troubleshoot ignition system, go to 1b.

1b. Your TBI fuel injection system fueling is “triggered” from the ignition system. It is assumed that the coil is operational, a 12 volt ignition 1 (IGN1) source is connected to the positive terminal of the coil.

Remove plug wire and check for spark while cranking.

No Spark – Repair ignition system.

Has spark – Insure wire continuity between the ECM and the distributor . If fuel is still not spraying go to fuel system troubleshooting before replacing any components. If all wires are in tact and routed correctly and all fuel system checks are correct, replace distributor module.

2. Perform the fuel system checks found at the beginning of this troubleshooting Guide. If the fuel pressure and fuel system are operating as required Insure that the check engine light is on with the key on but the engine not running and there are no stored codes.

If you have installed a new distributor, removed the distributor for any reason your ignition timing may be off too much to operate the engine properly. Disconnect the connector from the injector and set the ignition timing to its proper setting while cranking the engine. Assumption here also is that the timing mark on the balancer is lined up with TDC of #1 cylinder and that the distributor is seated properly and not 180 degrees off. If all of this checks OK go to step 3.

3. Measure the voltage on the throttle position sensor. If using a scan tool you can read TPS, if not measure the voltage. To measure the throttle position voltage check between the brown wire and the black/white striped wire on the TPS with the TPS still connected and the key on. DO NOT PUNCTURE THE WIRES to measure this voltage and only use a digital voltmeter. Voltage can be measured by back probing the TPS connector between these wires either with a thin paper clip or appropriate tool used for this type of measurement. Voltage should be between .5 volts and .7 volts.

If you have gone through all of the above procedures and the engine still will not start you will need to call tech support. When you call tech support you will need to have the following information available.

Fuel pressure at the inlet of the TBI unit_____

Return line fuel pressure_____

Voltage measured at the battery while cranking_____

Voltage measured at the pink wire on the injector while cranking_____

Voltage measured at the TPS sensor key on engine off_____

Codes stored in the ECM

Any information that you feel is important for diagnosing the issue at hand.

2. My engine is running to lean, or is backfiring on acceleration.

Assumption here is that all plug wires are installed properly, the secondary ignition system (plug wires, coil, cap and rotor) is in good operating order and the engine is in good order.

Perform fuel system checks found at the beginning of this guide and make any corrections as necessary.

Check initial ignition timing again.

If the timing is OK check to insure that the timing is advancing as it should with throttle lever actuation.

If the fuel system checks performed are OK and the initial ignition timing is OK you will need to call tech support.

If you have gone through all of the above procedures and the engine is still running lean or is backfiring on acceleration you will need to call tech support. In many cases the specifications of the engine are different than what was originally discussed or assumed. When you call tech support you will need to have the following information available.

Fuel pressure at idle _____
Fuel pressure while briefly accelerating the engine to WOT _____
Return line fuel pressure _____
Voltage measured at the battery while running _____
Engine operational temperature _____
Initial ignition timing _____
Timing at 2000 RPM _____
Any information that you feel is important for diagnosing the issue at hand.

3. Engine runs too rich.

Check for vacuum leaks and insure that all vacuum leaks are corrected and sealed. If the engine is also running at a higher than expected idle this is a good indication of a vacuum leak as well.

1. Is the vacuum line to the MAP sensor securely fastened to both the MAP sensor port and a full manifold vacuum port on the intake manifold?

Yes, If engine is still running rich go to step 2.

No – Repair leak, kink or routing, is engine still running rich? If yes go to step 2.

3. Is the MAP sensor connected to a full manifold vacuum port?

Yes – If engine is still running rich go to step 3.

No – Correct the vacuum source issue, if the engine is still running rich go to step 3.

3. Is the fuel pressure measured at 42 - 55 psi while running?

Yes – If the engine is still running rich go to step 4.

No – Is the return line connected to an unrestricted return port on the fuel tank?

Many fuel tanks have a port on the fuel tank that is for a fuel vent. These ports are not adequate for a fuel return. There is an orifice in these ports that will restrict the flow of fuel. Check that you have not used a vent port for the fuel return line.

No – Go to step 3a.

Yes – Fuel is being returned to a vent line. Re-route fuel return line to a non

orificed port or fabricate a free flowing return line port to the fuel tank or fuel return. If still running rich go to step 3a.

3a. Measure return line fuel pressure. This pressure should be less than 3 psi, if not there is a restriction in the return fuel line. If return fuel line pressure is less than 3 psi and the engine is still running rich go to step 4.

If return line pressure is not less than 3 psi there is a restriction in the fuel line Find and repair the restriction until the fuel pressure on the return line is less than 3psi. In some cases this requires a larger diameter fuel return line. Go to step 3b to help determine root cause of increased return line pressure.

3b. Remove the fuel return line and attach a length of rubber hose of sufficient length to run into an approved gasoline container. Run engine and recheck fuel pressure on both the feed side and the return side. If both sides are within the above ranges there is a restriction in the fuel delivery system that needs to be repaired.

4. Does the engine have a fully operational thermostat?

Yes – insure that the engine will reach 190 deg. in a reasonable time, go to step 5.

No – Install new thermostat, proper size thermostat will be 190- 195. 160 or 180 degree thermostat is not acceptable for this application and will not comply with AFI warranty or emissions requirements. If still running rich go to step 5.

5. Is the coolant sensor installed in a portion of the engine or the cylinder block which provides a constant flow of coolant over the tip of the sensor?

Yes –Go to step 6.

No – Reinstall the coolant sensor in a different location to insure constant flow of coolant over the sensor. If still running rich go to step 6.

6. Is the charging system operating properly and is the voltage measured at the battery and the injector 13 volts or higher with the engine running?

Yes – Go to step 7.

No – Repair charging system. Note the discussion about older style AC Delco single wire alternators. If still running rich after repairing go to step 7.

7. If you have gone through all of the above procedures and the engine is still running rich you will need to call tech support. In many cases the specifications of the engine are different than what was originally discussed or assumed. When you call tech support you will need to have the following information available.

Fuel pressure at idle_____

Return line fuel pressure_____

Voltage measured at the battery while running_____

Voltage measured at the pink wire on the injector while cranking.

Engine RPM at start up idle on a cold start_____

Engine RPM at idle with stabilized temperature_____

Engine operational temperature_____

Initial ignition timing_____

Any information that you feel is important for diagnosing the issue at hand.

4. I do not seem to have as much power as I should.

Verify that you have set your timing properly, timing should be set to 12 deg. BTDC with the engine fully warmed up and RPM below 800.

Verify that the timing mark for TDC of #1 cylinder that is being used to set the timing lines up properly with TDC of #1 cylinder (#1 piston at TDC with spark plug removed).

Ensure that your plug wires are properly connected with the correct firing order.

Your fuel pressure may be insufficient; see fuel system checks at the beginning of this guide.

Verify that there are no vacuum leaks and that the MAP sensor is properly connected.

5. I am getting a sag when I accelerate.

Insure that the MAP sensor and TPS sensor are working properly with scan tool. Default values for MAP and TPS are a single value and can cause a sag if not operating properly.

Timing is a critical issue with sags. Verify that your timing is correctly. see #4 also.

Fuel pressure is not adequate for proper operation, make sure that there is no contamination in the tank or your fuel filter is plugged. (See Fuel System check above). A plugged fuel filter may be an indication of a contaminated tank.

Bad ground to the block, insure that the surface that you are making the connection to on the block is clean and making a positive connection.

Your O2 sensor may be contaminated, bad or not properly installed in the exhaust.

You may have left out some of the important specifications for the proper calibration chip to be made.

If you have gone through all of the above procedures and the engine is still sagging on acceleration you will need to call tech support. In many cases the specifications of the engine are different than what was originally discussed or assumed. When you call tech support you will need to have the following information available.

Fuel pressure at idle _____
Fuel pressure when throttle is blipped to WOT _____
Return line fuel pressure _____
Voltage measured at the battery while running _____
Voltage measured at the pink wire on the injector while cranking. _____
Engine RPM at start up idle on a cold start _____
Engine RPM at idle with stabilized temperature _____
Engine operational temperature _____

Initial ignition timing_____

Any information that you feel is important for diagnosing the issue at hand.

6. My engine takes longer to start than I think it should.

Check for vacuum leaks, this is the most common cause.

Make sure that your timing is set correctly; see Troubleshooting point #4.

Fuel pressure is not adequate for proper operation. See Fuel System Checks at the beginning of this guide.

Fuel pump relay is not coming on or is faulty.

Check that the MAP sensor is properly connected to a full manifold vacuum source. Ensure that the vacuum source to your MAP sensor is free from restrictions and has a secure connection.

Throttle plates are not adjusted properly not allowing an adequate amount of air for starting the engine. Go to Troubleshooting guide #10 and verify the adjustment.

Throttle position sensor is out of adjustment or faulty. Throttle position voltage with throttle fully closed with the key on should be .5 volts + .2 volts.

If you have gone through all of the above procedures and the engine is still sagging on acceleration you will need to call tech support. In many cases the specifications of the engine are different than what was originally discussed or assumed. When you call tech support you will need to have the following information available.

Fuel pressure at idle_____

Voltage measured at the battery while running_____

Voltage measured at the pink wire on the injector while cranking_____

Voltage measured between the black wire and brown wire on the TPS with the key on engine not running_____

Engine RPM at start up idle on a cold start_____

Engine RPM at idle with stabilized temperature_____

Engine RPM at idle with IAC fully blocked off._____

IAC counts at stabilized idle in drive if using a scan tool_____

Engine operational temperature_____

Initial ignition timing_____

Any information that you feel is important for diagnosing the issue at hand.

7. The fuel pump is not coming on when I first turn the key on.

Is the check engine light on with the key on engine off? (Assumes check engine light is connected properly, see installation instructions to verify check engine light installation)

Yes - Go to step 1.

No – Check for proper installation of check engine light.

- a. Check fuses to insure that they are not blown. If fuses are OK go to b.
 - b. Check voltage at check engine light, if 12 volt are not present the check engine light is not connected properly. If 12 volts are present either the ECM is not powered properly or is defective.
1. Insure that the IGN1 wire is not connected to a battery feed.
 - a. Check pink wire to the power relay and/or the pink wire powering up the injector(s) to insure there is no voltage with the key off. If voltage is present with the key off the pink wire is not properly connected or the power relay is bad.
 - a. Check fuel pump relay for proper operation.
 - Turn ignition off for at least 15 seconds.
 - Connect an ohmmeter or test light to the blue wire at the fuel pump relay.
 - Turn ignition on, a ground signal should be present at this wire for the first 2 or 3 seconds after turning on the ignition switch.
 - If ground is not present either the ECM is not powered or grounded properly or the ECM is faulty.
 - If ground is present check for voltage at the fuel pump with the same type of operation.
 - If voltage is not present at the fuel pump check the wiring, if wires appear to be OK replace the fuel pump relay.
 - If voltage is present verify the ground for the fuel pump is sufficient and securely fastened. If fuel pump ground is OK the fuel pump is defective.

If you have gone through all of the above procedures and the fuel pump is still not coming on when you turn the key on you will need to call tech support. When you call tech support you will need to have the following information available.

Voltage measured at the check engine light with key on engine off_____

Voltage measured at the pink wire on the injector while cranking_____

Voltage measured at the pink wire on the injector with the key off_____

Ohms measured at the blue wire at the fuel pump relay at first 3 seconds of the key on_____

Voltage measured at the pink wire to the fuel pump at the first 3 seconds of the key on_____

Voltage measured with voltmeter between the black wire and pink wire on the fuel pump for the first 3 seconds of the key on_____

Any information that you feel is important for diagnosing the issue at hand.

8. The RPM on my engine does not come down when I come to an idle.

- More than likely you have a large vacuum leak, verify that your system is free from vacuum leaks.
- Check that all non used vacuum ports are plugged.
- Your ignition wire is connected to a battery source and not an ignition 1 source.
- The engine has not come to full operating temperature as of yet.

- Your thermostat is inoperable or opens at too low of a temperature. A 190° stat is required for this application.
- Throttle cable or throttle on the throttle body is not coming to a complete close. Throttle plate is binding in the throttle bores.
- The throttle plates are adjusted too far out, see procedure #10 for proper adjustment sequence.
- IAC is not working, either faulty or there is a wiring issue.
 - i. Shut engine off and wait for 20 seconds
 - ii. Unplug IAC connector from IAC
 - iii. Start up engine, RPM should be significantly higher than the base RPM. If the engine RPM did not increase the IAC is bad or the wiring is faulty to the IAC or the ECM is bad.

If you have gone through all of the above procedures and the engine is still idling too high you will need to call tech support. When you call tech support you will need to have the following information available.

Voltage measured between the black wire and brown wire on the TPS with the key on engine not running_____

Engine RPM at start up idle on a cold start_____

Engine RPM at idle with stabilized temperature_____

Engine RPM at idle with IAC fully seated or blocked off._____

IAC counts at stabilized idle in drive if using a scan tool_____

Engine operational temperature_____

Initial ignition timing_____

Any information that you feel is important for diagnosing the issue at hand.

9. I am not getting as good of fuel economy as I think I should.

If all is set up properly with the installation of your fuel injection system you are probably getting as good of fuel economy as you are going to get.

1. Insure that your timing is set properly
2. Your thermostat is in good working order and is 190 degree or above.
3. Your fuel pressure is at the specified pressure (see fuel system check at the beginning of this guide.
4. You may have other factors such as tires, brake drag or other external issue from the fuel injection system that is not working properly.
5. Re-evaluate your driving habits and insure that you are driving in a fashion that will provide you optimum fuel economy. If you are trying to race everyone from the light chances are you will not get the fuel economy that you expect.

If you have gone through all of the above procedures and you still feel that you should be getting better fuel economy you will need to call tech support. In many cases the specifications of the engine are different than what was originally discussed or assumed. When you call tech support you will need to have the following information available.

What is the Fuel Economy that you are getting _____

What is the Fuel Economy that you are expecting _____

Voltage measured at the battery while running _____

Voltage measured between the black wire and brown wire on the TPS with the key on engine not running _____

Engine RPM at idle with stabilized temperature _____

Engine operational temperature _____

Initial ignition timing _____

Trouble Codes from the ECM (see #14) _____

Any information that you feel is important for diagnosing the issue at hand.

10. The engine is revving up and down when I come down to an idle. There is a large “sucking” sound coming from the throttle body when it is warmed up. My engine stalls or almost stalls when I come down to an idle.

This is usually an indication of a vacuum leak; again make sure that you have no vacuum leaks.

This could also be an indication of the wrong base ignition timing. Verify that you have set your ignition timing correctly (see #4).

Your engine may also require more air going through the throttle plates at idle than it is currently set for. Here is a procedure to check this setting.

- a. Make sure your engine temperature is at full operating temperature.
- b. Plug the IAC passage on the inside of the throttle body with a piece of tape or your finger and unplug the IAC connector from the IAC.
- c. Check that the RPM is 775 – 800 in neutral with the engine fully warmed up. Adjust as necessary, re-install the IAC connector, remove the tape if you taped over the IAC port and turn the engine off.
- d. Wait for 30 seconds with the key turned off and then restart the engine.
- e. If you have a fast idle after 1 minute of operation this did not work or you have a vacuum leak that is not repaired, or the throttle plates are already too far open. You may have to go through the procedure again.
- f. If you do not have a fast idle then it is OK and you can proceed to determine if the plates are adjusted properly. Let the engine idle for a little bit and then check your idle speed in drive. The speed should be about 625 in drive. If it is lower than this you can raise the idle up or if it is above this determine if you should bring the speed down.

If you have gone through all of the above procedures and the engine is still idling too high you will need to call tech support. When you call tech support you will need to have the following information available.

Voltage measured between the black wire and brown wire on the TPS with the key on engine not running _____

Engine RPM at start up idle on a cold start _____

Engine RPM at idle with stabilized temperature _____
Engine RPM at idle with IAC fully seated or blocked off. _____
IAC counts at stabilized idle in drive if using a scan tool _____
Engine operational temperature _____
Initial ignition timing _____
Any information that you feel is important for diagnosing the issue at hand.

11. The engine stalls coming to an idle.

Verify all ignition system components are operating properly, including cap, rotor, secondary ignition wires and coil.

Verify that the IAC is operating properly.

- Shut engine off and wait for 20 seconds
- Unplug IAC connector from IAC

Start up engine, RPM should be significantly higher than the base RPM. If the engine RPM did not increase the IAC is bad or the wiring is faulty to the IAC or the ECM is bad. Repair as necessary.

Verify proper fuel pressure, perform above fuel system checks.

Verify timing is proper

Verify that the EGR is working properly and not sticking. (if equipped)
Sticking EGR valve will cause a stall.

12. My fuel pump is real noisy.

If your fuel pump is real noisy you may not have isolated it from the body or the frame real well. Isolation brackets were provided with your fuel pump. If these are properly installed it should isolate any radiated noise from the pump. If this is insufficient you may need to isolate it more with some rubber grommets.

We have also diagnosed noisy fuel pumps with fuel return lines being too small. By stepping up the size of the return line you may eliminate fuel pump noise after the other items have been addressed. Fuel pump noise also can radiate through the fuel lines to the frame or body of the vehicle. Insure that the fuel lines are isolated as well if need be to eliminate the noise.

A noisy fuel pump can also be an indication that it is starving for fuel. Insure that all filters are in good order and that the fuel tank sock is clean. Prolonged fuel starvation will damage the fuel pump and not allow proper flow; it may also radiate a lot of noise.

13. My check engine light does not come on when I turn the key on.

Your check engine light should illuminate when you turn the key to the on position for a bulb check.

Check for proper installation of check engine light.

- a. Check fuses to insure that they are not blown. If fuses are OK go to b.

- b. Check voltage at check engine light, if 12 volt are not present the check engine light is not connected properly. If 12 volts are present either the ECM is not powered properly or is defective.
- c. If the fuse is OK insure that you are receiving 12 volts to the ECM where indicated (see wiring diagram provided) If you are not receiving 12 volts to the ECM something in the vehicle's power circuit is not connected properly.
- d. If 12 volts is available at the proper cavities of the ECM please check that you have a proper ground circuit to the engine block.

If you have gone through all of the above procedures and the fuel pump is still not coming on when you turn the key on you will need to call tech support. When you call tech support you will need to have the following information available.

Voltage measured at the check engine light with key on engine off _____
 Voltage measured at the pink wire on the injector while cranking _____
 Voltage measured at the pink wire on the injector with the key off _____
 Any information that you feel is important for diagnosing the issue at hand.

14. My check engine light is on when the engine is running.

A check engine light indicates a hard fault with your fuel injection system.

Insure that all of your sensors are connected, you have a good ground and that no wires are pinched.

Also insure no vacuum leaks and that your MAP sensor is connected to a full manifold vacuum source.

If all of these steps indicate a proper installation and no issues you will need to read the codes from the memory area of the ECM and follow the diagnostic procedures for that particular code.

Your AFI fuel injection system is equipped with the latest OBDII level software to retrieve trouble codes. Using any OBDII CAN protocol scan tool you can display the trouble codes. If you have the service software for your ECM this is very easy as well. Simply connect the laptop and any trouble faults will be listed under trouble faults.

An OBDII connector is provided that will plug into the CAN (ALDL) connector in your harness. This connector is not supplied with every kit but to every location. Larger locations will have several connectors based on the # of Scan tools available to the location. These connectors should be kept with the scan tool. The ALDL connector (ALDL) should be kept sealed with the appropriate connector at all time the vehicle is in operation and not using the diagnostic tools.

15. Engine shuts down and sometimes restarts and sometimes it doesn't.

Your AFInjection system is equipped with several integrated automatic shutdown features. Some are standard and others are optional. Each shut down will set a DTC and store the code in the ECM. Insure that you clear any code after diagnosing that your issue was an automatic shut down feature.

The shut down features are as follows:

High engine coolant shut down. (standard)

The ECM will cause the engine to shut down if the temperature reaches 238 deg F. It will not run until the temperature is below 234 deg F.

- A code P0217 will set under this condition.
- Insure that you clear the code if this code has been present.
- This same condition will be present if the ECT is defective.
- If your vehicle is continually setting this code and/or shutting down, determine the cooling system issues which are causing it and repair accordingly.
- Engines need to be equipped with the proper size radiator, fan and a fan shroud to provide proper cooling.

Low Oil Pressure Shut Down (optional, standard with complete engines)

The ECM will cause the engine to shut down if the oil pressure falls to a dangerous level. A bypass switch is not required for this operation. The engine however will start and run for a few seconds when a low oil pressure condition exists.

- A code P0521 will set under this condition.
- Determine the cause of the low oil pressure and repair as necessary.
- Insure that you clear the if this code has be present.
- An unplugged Oil Pressure Sensor will also cause this condition and set a code P0522 will set.

Low Fuel Shut Down (optional)

The ECM along with a fuel level sensor will shut the engine down and not allow a re crank of the engine if the fuel falls below 10 - 15% fill. This feature is incorporated to reduce damage which can be caused to the electric fuel pump if the vehicle is run out of fuel.

A red light installed on the dash panel will illuminate when the fuel tank begins to get below 25%. At first the light will flash on and off at irregular intervals staying off longer than it stays on and the staying on longer than it stays off if the vehicle is not refueled.

At one point the light will come on and stay on at which time a 30 minute timer will begin to count up. Turning off the vehicle will not clear the timer. If after 20 minutes of operation with the low fuel light on the vehicle is not refueled the light will begin to flash. At this point also the rev limiter on the engine may be reduced to 2000 RPM. If the vehicle is still not serviced after 10 minutes of operation with the low fuel light flashing the ECM will shut the engine down. When equipped with "Smart Start" the engine will not crank at this time either so that the operator does not damage the starter and the ring gear on the transmission from cranking with no start.

The only way to correct this condition is to fill the tank up. Once the tank is filled up you may have to wait 10 seconds or so with the ignition turned on to clear the timer and allow for normal operation again.

Low Fuel Level will set a code P1462 and store it in the ECM. Clear this code if you have it stored in the ECM. This will also tell you how the operators are using the equipment.

Smart Start (optional)

This feature controls the engine cranking through the ECM. Used with Low Fuel Shut Down and other shut down features as a feature to not do damage to the engine or other components on the engine.

Smart start does not allow the engine to crank under the adverse conditions and/or does not allow the engine to crank for more than 10 seconds if it does not start.

Simply turning the key off and back on resets everything and allows the engine to crank unless it is in a protection mode.

Unattended Idle Shut Down (optional)

This feature will shut the engine down if it is left running at idle for a predetermined period of time. This will allow for compliance with regulatory agencies for length of idle time or to increase the fuel economy of the vehicle. The feature is also temperature activated so that the engine will be allowed to fully warm up before this feature is activated.

TROUBLE CODES

All trouble codes are standard OBDII level and values.

OBDII Code	OBDII Desc.
P0106	MAP Range Performance Problem-Sticking
P0107	MAP Circuit Low Input
P0108	MAP Circuit High Input
P0111	IAT Range Performance Problem
P0112	IAT Circuit Low Input
P0113	IAT Circuit High Input
P0115	ECT Range Performance Problem
P0117	ECT Circuit Low Input
P0118	ECT Circuit High Input
P0122	TPS Circuit Low Input
P0123	TPS Circuit High Input
P0130	O2 Sensor Circuit malfunction
P0131	O2 Sensor Low Voltage
P0132	O2 Sensor High Voltage
P0171	Fuel Trim Lean - At adaptive maximum
P0172	Fuel Trim Rich - At adaptive maximum
P0200	Injector Circuit Malfunction
P0217	Engine Over Temp Condition
P0219	Engine Overspeed Condition
P0230	Fuel Pump Circuit Malfunction
P0322	EST Circuit Open
P0460	Fuel Level Circuit Malfunction
P0462	Fuel Level Circuit Low
P0463	Fuel Level Circuit High
P0521	Engine Oil Pressure Low
P0522	Oil Pressure Circuit Low
P0523	Oil Pressure Circuit High
P0562	System Voltage Low
P0563	System Voltage High
P0650	MIL circuit malfunction
P1102	MAP In-Range Indicates Low
P1103	MAP In-Range Indicates High
P1121	TPS Adapt Low Min
P1122	TPS Adapt Low Max
P1123	TPS Adapt High Min

P1124	TPS Adapt High Max
P1131	O2 In-Range Indicates Low
P1132	O2 In-Range Indicates High
P1201	Injector PW Overflow
P1220	Medium engine overspeed
P1241	Output Voltage Range Low
P1242	Output Voltage Range High
P1350	EST Bypass Circuit Open
P1460	Fuel Level Is Low
P1461	Fuel Level is nearing empty
P1462	Fuel Level is Empty-engine shut down
P1478	Fan Circuit Malfunction
P1506	IAC Fault
P1507	IAC Fault
P1655	Smart Start circuit malfunction

- P0106 MAP sticking, voltage not changing.**
- P0107 Low voltage (high vacuum) at MAP sensor.**
- P0108 High voltage (low vacuum) at MAP sensor.**
- P1103 MAP in range error high.**
- P1102 MAP in range error low.**
- P0111 IAT in range error. IAT has failed but is not an open or shorted circuit.**
- P0112 IAT Low, Sensor could be unplugged Resistance will be high with this issue.**
- P0113 IAT High, Sensor could be grounded out. Resistance will be low with an issue.**
- P0115 ECT in range error. ECT has failed but is not an open or shorted circuit. An ECT not installed in the proper location can cause this code also. A bad or weak thermostat can also cause this code.**
- P0117 ECT Low, sensor can be unplugged, engine will run very rich with this issue. Resistance will be high or open circuit.**
- P0118 ECT High, sensor can be shorted or bad and engine will run lean with this issue. Bad sensor will have low resistance.**
- P0217 ECT over temperature. Set when engine is over 248 deg. F (120 deg. C). Overheating of the engine causes this code.**
- P0122 Low voltage at throttle position sensor**
- P0123 High voltage at throttle position sensor. Sensor could be unplugged.**
- P1121 TPS adjusted at too low of a voltage.**
- P1122 TPS adjusted at too high of a voltage.**
- P1123 TPS not reaching high enough voltage.**
- P1124 TPS voltage too high at part throttle.**
- P0130 Oxygen sensor signal stays lean during warm engine cruise, your O2 sensor could be unplugged.**

P0131 O2 sensor failed lean (low voltage)
P0132 O2 sensor failed rich (high voltage)
P1131 O2 sensor lean, does not mean sensor is bad, can set with large vacuum leak, low fuel pressure or other event causing a lean condition. Contaminated sensor can cause this code.
P1132 O2 sensor rich, does not mean sensor is bad, can set with contaminated sensor, too high of fuel pressure or any event causing a rich condition.
P0172 Internal fuel memory is at its rich limit
P0171 Internal fuel memory is at its lean limit
P0200 Injector or injector circuit fault
P1201 Injector PW overflow
P0230 Low voltage at fuel pump or Low voltage at Fuel pump relay
P0322 Low voltage at electronic spark timing circuit
P1350 Fault at electronic spark timing bypass circuit
P0460 Fuel level circuit malfunction
P0462 Fuel level circuit low
P0463 Fuel level circuit high
P1460 Fuel level is low, low fuel light is on
P1461 Fuel level is at a critical level, low fuel light is flashing
P1462 Engine has shut down due to low fuel level, low fuel light is Flashing
P0521 Oil pressure low, engine will shut down after a short start up or will shut down if the engine loses oil pressure.
P0522 Oil pressure circuit low
P0523 Oil pressure circuit high
P0563 High voltage at battery
P0562 Low voltage at battery
P0650 MIL circuit malfunction
P1241 Sensor voltage is Low
P1242 Sensor voltage is High
P1506 IAC circuit error
P1507 IAC circuit error
P0219 Engine has been operated at the rev. limiter
P1220 Medium engine over speed
P1655 Smart Start circuit malfunction

ECM Connector Pin Out and Wire Coding

Connector A

Pin #	Wire Color	Connect to:
1	Green	IAC - B
2	Blue	IAC - A
4	Yellow	Low Fuel Light
5	Green	Injector
7	White	EGR Solenoid
8	Yellow	Smart Start Relay
9	Clear or Red	Dist Mod D
10	Black	Dist Mod B
11	Green	Fan Relay
14	Blue	Fuel Pump Relay
16	Black	Ground
17	Yellow	IAC - C
18	Purple	IAC - D
22	Black	Power Relay control
23	Pink	Power Relay output
24	Orange or White	C E Light

Connector B

Pin #	Wire Color	Connect to:
1	Blk/Wht	Sensor Gnd
4	Tan	Ign, Crank
5	Orange	Dist. A
7	Blue	Oil Pressure - C
8	Pink	Ign. 12v
12	Yellow	ECT
13	Purple	O2 - C
14	Blue	Fuel Level
15	Tan	IAT
17	Black	Ground
18	Brown	MAP - B
20	Blue	ALDL - J
21	White	ALDL - K
22	Red	Battery
23	Brown	TPS - C
24	Orange	5v Ref.

Non-Certified 4.9L Engine Wire Diagram

